

VACUJET

VJ 2500-1-E

for electric control

Vacujet 2500-1-E-EXI PN 001.1103
with sealing lip

Vacujet 2500-1-E-EXI PN 001.1104
with brush

Vacujet 2500-1-E-24V PN 001.1145
with sealing lip

Vacujet 2500-1-E-24V PN 001.1146
with brush

Description:

The Vacujet 2500-1-E is intended for the use as floor cleaning unit which, in connection with a suction device, cleans and disposes simultaneously in a non-polluting way.

Depending on requirement to the ground sealing the Vacujet can be equipped with a brush or in case of highest requirements to density with a sealing lip.


Advantages:

- When using a suction device a separate disposal of suspension risen from cleaning is not necessary.
- Speed adjustable by air pressure and air quantity
- Parts under pressure made of high-tensile stainless steel
- Retrofit kit for fan jet nozzle form 9 (max. 2000 bar) PN 010.7963
- Optimum jet stream when using nozzle form 21 LL (LL = LongLife) see product sheet D-21LL-3000

Operating information:

The air motor is only to be used with dry, clean and lubricated air.

We recommend WOMA pressurized air maintenance unit PN 010.8955.

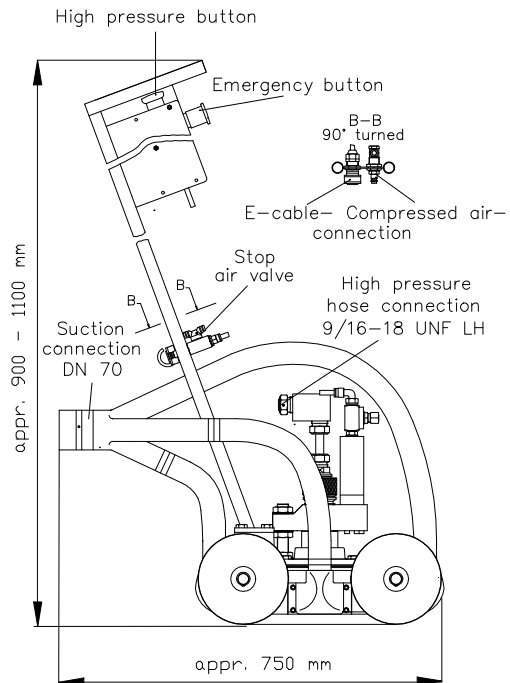

Technical data:

Operating pressure	: max.	2500 bar
Overall width	: appr.	440 mm
Working width	: appr.	225 mm
Weight	: appr.	36,0 kg
Speed Spray bar	: max.	2500 1/min
Air consumption	: max.	0,52m ³ /min at 6 bar
Air pressure	: max.	7 bar
No. of nozzles	: max.	8 pieces
Recommended nozzles	:	form 21 LL or form 21 Sapphire

Recommended nozzle diameters at:

2500 bar and 20 l/min		
4 x 0,25 mm	form 21 LL	TN 344.2102 and
4 x 0,30 mm	form 21 LL	TN 344.2103

* When using nozzle form 21 Sapphire, the nozzle diameters must be 0.05 mm larger than that of nozzle form 21 LL.